


REV	ECH #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012\04\26

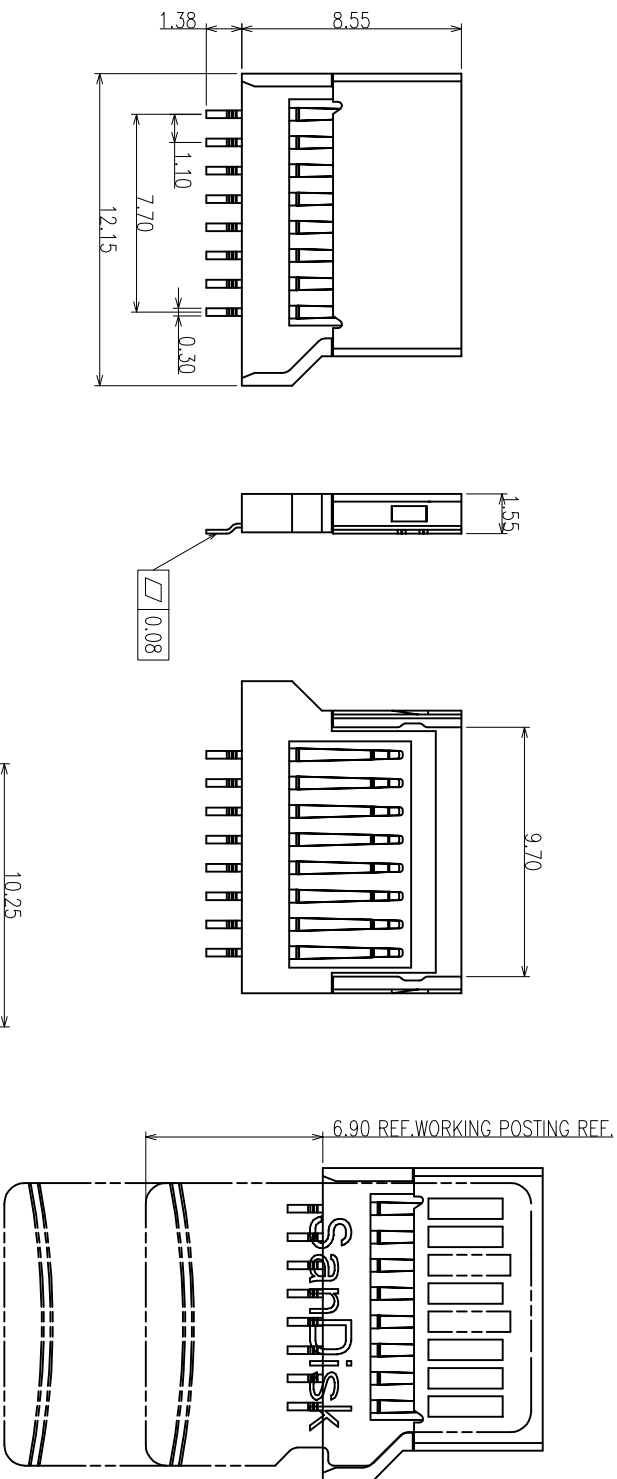

- NOTES 1:
- 1.0 RATING:
  - 1.1 VOLTAGE:100 VAC (rms)
  - 1.2 CURRENT: 0.5 AMPERES MAX PER CONTACT
  - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C
  - 2.0 ELECTRIC CHARACTERISTICS:
  - 2.1 CONTACT RESISTANCE:100mΩ MAX
  - 2.2 INSULATION RESISTANCE:1000MΩ MIN.
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
  - 3.0 OPERATION LIFE: 5000 CYCLES
  - 4.0 MATERIAL/FINISH:SEE TABLE A

PRODUCT NO.

TF06 - 08 A B 05- 01

① ② ③ ④

① 产品系列:

TF06-1-FLASH CARD CONNECTOR 抽展式 1.6H

② 产品件数:




08: 8P1N

③ 塑胶材料:

A: LCP BLACK

④ 流水码:

01:1.6h,无柱

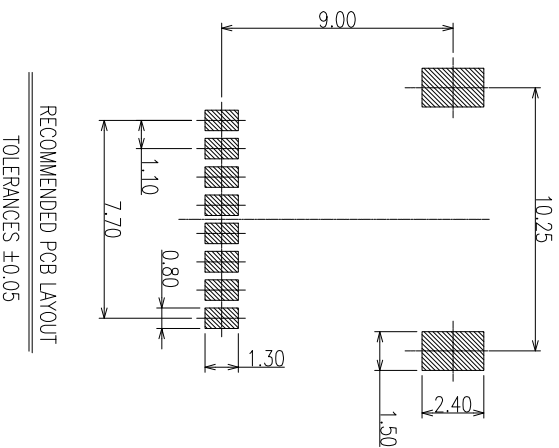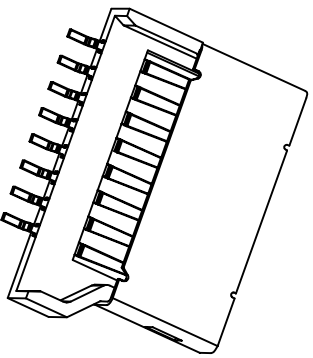

ITEM	NAME	QTY/EACH	MATERIAL/FINISHED	REMARK
3	PAD	2	COPPER ALLOY SN PLATED	
2	CONTACT	8	COPPER ALLOY MATING AREA AU PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0, BLACK	

**CUSTOMER DRAWING**

**YTCOMM**  
<http://www.hnytc.com>  
**Dongguan YTCOMM Electronics Technology Co., Ltd**

GENERAL TOLERANCE

X: ±0.20  
 XX: ±0.15  
 XXX: ±0.10

ANGLE TOLERANCE

X: ±5°  
 XX: ±2°  
 XXX: ±1°

DRAWING DEY1

APPROVED

DATE: 2014.10.14

P/N: TF06-08AB05-01

DRAWING NO. C-TF06-01

UNIT	SCALE	SIZE	SHEET	SHEET	REV
mm	1:1	A4	1 of 1		A